




### Zone Chart for Dimensional References

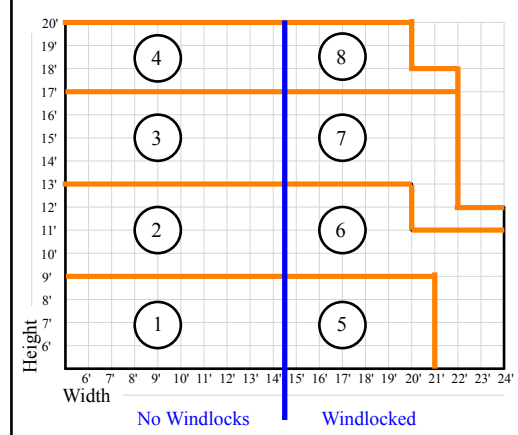

NOTE: 14'4" equals maximum width for Non-Windlock

| Zone | H   | B   | T      | D      | X      | Y      | Z      |
|------|-----|-----|--------|--------|--------|--------|--------|
| 1    | 15" | 16" | 6"     | 8-1/2" | 3-7/8" | 3-5/8" | 6-1/2" |
| 2    | 17" | 18" | 6"     | 8-1/2" | 5"     | 3-5/8" | 6-1/2" |
| 3    | 19" | 20" | 6"     | 8-1/2" | 5"     | 3-5/8" | 6-1/2" |
| 4    | 21" | 22" | 6"     | 8-1/2" | 5"     | 3-5/8" | 6-1/2" |
| 5    | 17" | 18" | 6-1/2" | 9-1/2" | 5-3/8" | 4-1/4" | 7-1/2" |
| 6    | 19" | 20" | 6-1/2" | 9-1/2" | 5-3/8" | 4-1/4" | 7-1/2" |
| 7    | 21" | 22" | 6-1/2" | 9-1/2" | 5-3/8" | 4-1/4" | 7-1/2" |
| 8    | 23" | 24" | 6-1/2" | 9-1/2" | 5-3/8" | 4-1/4" | 7-1/2" |

Dimensions are approximate. Contact factory to request specific drawing.

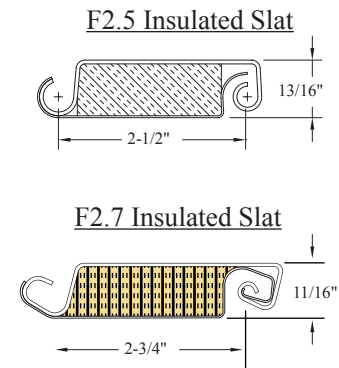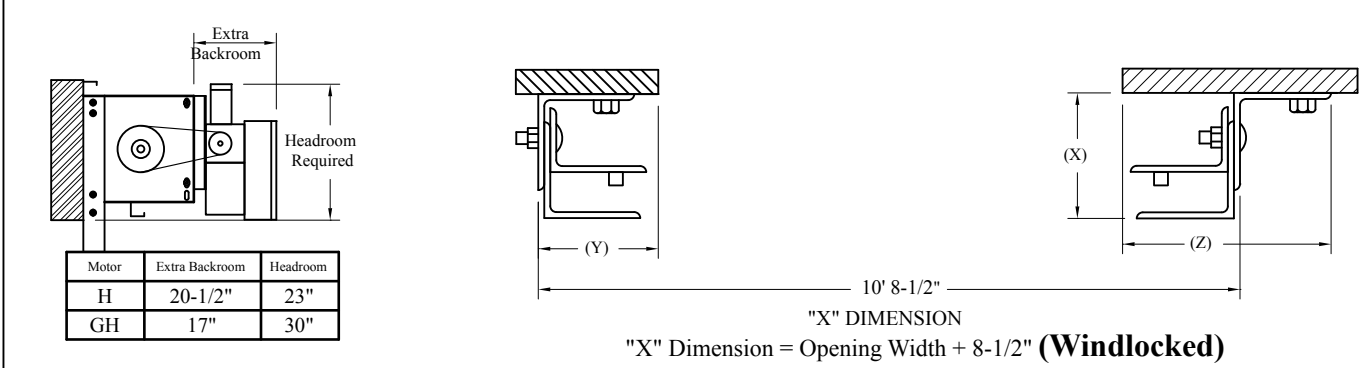

18 Gauge Available with LIP Polyurethane Insulation and Expanded Polystyrene Insulation

20, 22, 24 Gauge Available with Polyurethane Insulation

04/2016 Copyright 2016 C.H.I. Overhead Doors

| Door Qty.           | Door Width | Door Height | Jamb Type | Model | Exterior Color |
|---------------------|------------|-------------|-----------|-------|----------------|
|                     |            |             |           |       |                |
| Miscellaneous Notes |            |             |           |       |                |
|                     |            |             |           |       |                |



|               |              |
|---------------|--------------|
| ARCHITECT:    |              |
| CONTRACTOR:   |              |
| PROJECT NAME: |              |
| DOOR COMPANY: |              |
| PREPARED BY:  | DOOR NUMBER: |
| QUOTE NUMBER: | DATE:        |