
FIRE RATED COUNTER SHUTTERS

Model ERC20 (Integral Frame and Sill)

MEASURE THE WIDTH AND HEIGHT OF THE OPENING

DOOR SIZE AND AREA




COMPONENT DIMENSIONS

Reference the zone number to view component dimensions for motorized doors.




GUIDE CONSTRUCTION OPTIONS SLAT CROSS SECTION



The dimensions featured on this sheet are provided as a guide. Please visit our website at www.cooksondoor.com/drawings to generate drawings on demand with exact dimensions.




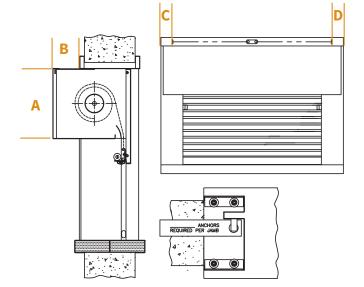


UL LABELED COUNTERTOPS

Laminate Countertops have a 1⁵/₈" thick fire retardant core. UL 1¹/₂ hour label. One piece countertops fit openings up to 10' wide, two-piece with center joint for openings up to 16' wide. **Standard** plastic laminates may be selected from Formica[®] or Wilsonart[®]. Custom designed in all shapes at right.


Stainless steel countertops are 14 gauge stainless steel in #4 finish, with a refractory UL Classified Plastic Laminate Only fiber core. UL 1½ hour label. Custom designed to a maximum wall opening width of 11'2" for face of wall units (T-Shape), and 11'10" for between jambs (rectangular shape). Maximum length is 11'10" wide. Maximum wall thickness is 12".




ROLLING COUNTER FIRE DOORS WITH INTEGRAL FRAMES



SECTION



JAMB DETAILS



The dimensions featured on this sheet are provided as a guide. Please visit our website at www.cooksondoor.com/drawings to generate drawings on demand with exact dimensions.

CUSTOM-DESIGNED SOLUTIONS

Our experienced Architectural Design Support Team can customize our products to fit your specific application. Call 800.294.4358 ext. 1280 or email ads@cooksondoor.com.

