

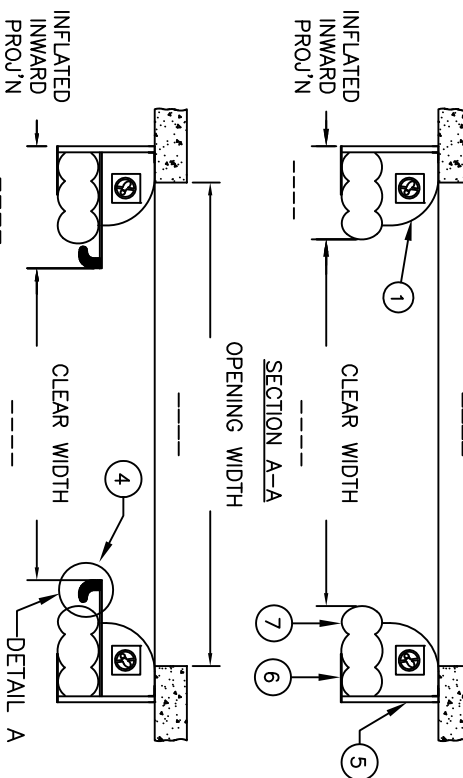
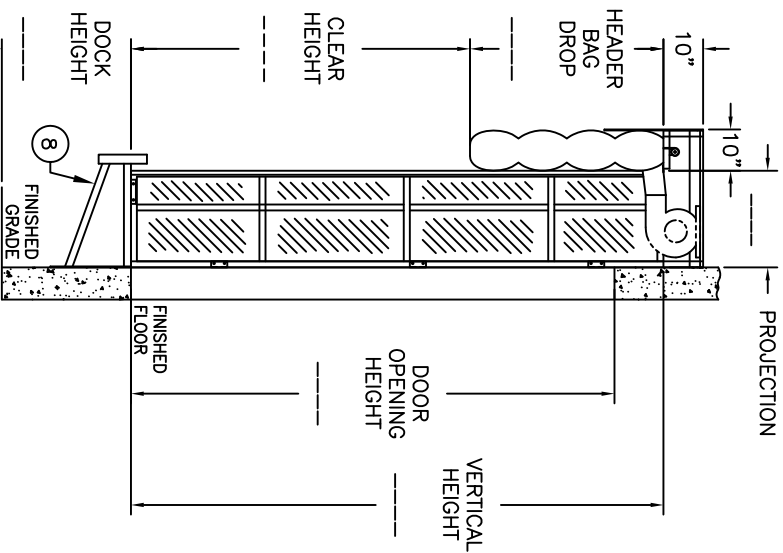
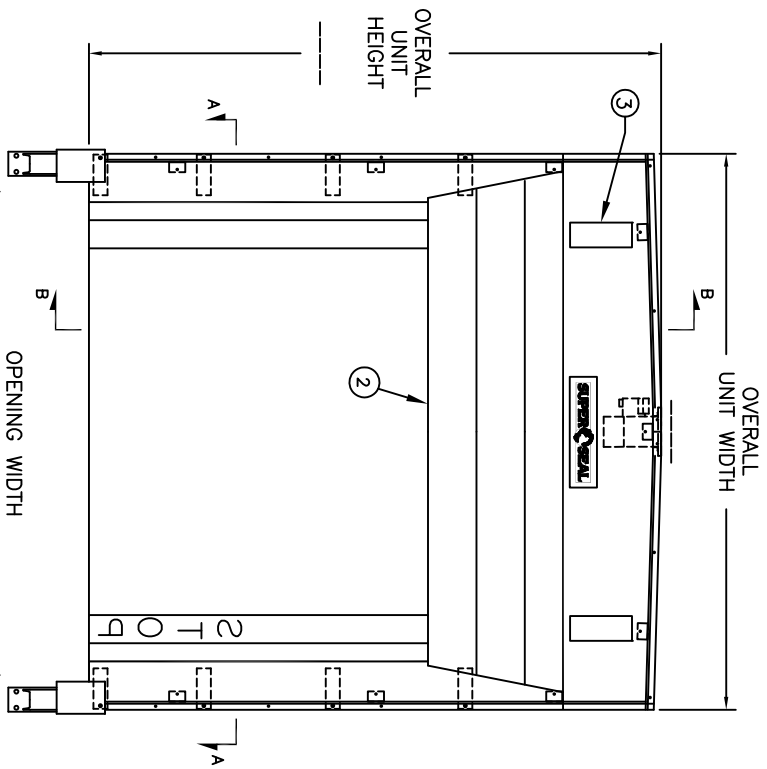




SECTION A-A
OPTION: 'ST' STYLE

DETAIL A - ALTERNATIVE
C/W MONOFILAMENT OPTION ONLY
SUPER SNUG 'ST' STYLE
*ADD 6" TO INWARD PROU'N
FOR SUPER SNUG*



DETAIL A
SUPER SNUG 'RT' STYLE

- LEGEND**
1. INWARD INFLATABLE DRAFT PADS
 2. INFLATABLE HEADER AIR BAG
 3. YELLOW GUIDE STRIPE
 4. OPTION: SUPER SNUG 'RT' STYLE
 5. STEEL VERTICAL FRAME MEMBER C/W PAINTED STEEL SIDING
 6. PROTECTIVE INWARD PANEL - SS90-2
 7. INFLATABLE VERTICAL AIR BAG - 16oz 'RIPSTOP'
 8. STEEL PROTECTIVE GUARDS - PAINTED

S.S. QUOTE REF. #: _____
CUSTOMER : _____
APPROVED BY: _____
P/O No.: _____
DATE: _____



MODEL 401A STATIONARY
INFLATABLE TRUCK SHELTER

- DOOR OPENING: _____ W _____ H
- QUANTITY: _____
- COVER FABRIC: _____
- COLOR: _____
- OPTIONS (CHECK BOX IF APPLICABLE)**
- ☐ FLAT TOP UNIT
 - ☐ TAPERED UNIT
 - ☐ EXTRA WIDTH OF UNIT
 - ☐ EXTRA HEIGHT OF UNIT
 - ☐ EXTRA HEADER AIR BAG DROP
 - ☐ EXTRA INWARD PROJECTION
 - ☐ WOOD FRAME
 - ☐ STATIONARY VERTICAL 401 PANELS IN LIEU OF AIR BAGS
 - ☐ FABRIC TYPE: _____
 - ☐ EXTRA INWARD PROJECTION
 - ☐ STATIONARY VERTICAL SUPERSNUG PANELS IN LIEU OF AIR BAGS
 - ☐ FABRIC TYPE: _____
 - ☐ EXTRA INWARD PROJECTION
 - ☐ MOTOR/BLOWER: 1/2 HP, 2850 RPM (REQUIRED FOR APPLICATIONS OUTSIDE NORTH AMERICA)
 - ☐ MOTOR/BLOWER: 1/2 HP, 3-PHASE
 - ☐ VOLTAGE: _____
 - ☐ AUTOMATIC SWITCH KIT
 - ☐ SUPER SNUG
 - ☐ 'ST' STYLE ☐ 'RT' STYLE
 - ☐ TUBULAR STEEL FRAME - PAINTED
 - ☐ EXTRA INWARD PROJECTION

DATE: REV. APR-24-17 SCALE: 1:48
DRAWN: SH DWG NO: L401A-E
APPROVED: ST PART NO: