
# **Product** Specifications

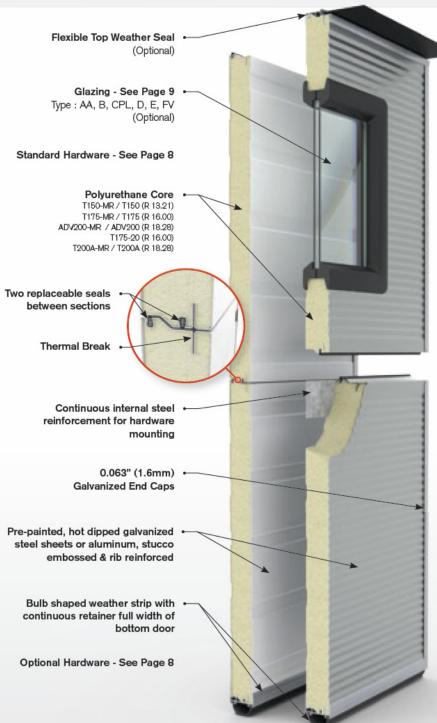

## Section Schedule

Door Height	Sections High	Door Width	Max no. of Windows
7'-1" to 8'-1" (2159mm to 2464mm)	4	8'-0" to 9'-2" (2438mm to 2794mm)	2
8'-2" to 10'-1" (2489mm to 3073mm)	5	9'-3" to 12'-2" (2819mm to 3708mm)	3
10'-2" to 12'-1" (3099mm to 3683mm)	6	12'-3" to 16'-2" (3734mm to 4928mm)	4
12'-2" to 14'-1" (3708mm to 4293mm)	7	16'-3" to 19'-2" (4953mm to 5842mm)	5
14'-2" to 16'-1" (4318mm to 4902mm)	8	19'-3" to 24'-2" (5867mm to 7366mm)	6
16'-2" to 18'-1" (4928mm to 5512mm)	9	24'-3" to 25'-2" (7391mm to 7671mm)	7

# Section Details

#### Section Thickness

T150-MR / T150 1 1/2" (38mm) T175-MR / T175 1 3/4" (45mm) ADV200-MR / ADV200 2" (51mm) T175-20 1 3/4" (45mm) T200A-MR / T200A 2" (51mm)

## Thermal Value of Sections

T150-MR / T150 R 13.21 ft2 hF/Btu / U 0.430 W/m2K T175-MR / T175 R 16 ft2 hF/Btu / U 0.355 W/m2K ADV200-MR / ADV200  $R 18.28 \, ft^2 \, hF/Btu / \, U \, 0.311 \, W/m^2 K$ T175-20 R 16 ft2 hF/Btu / U 0.355 W/m2K T200A-MR / T200A R 18.28 ft2 hF/Btu / U 0.311 W/m2K

### **Face Sheet Profile**

T150-MR / T150 Multi-Ribbed / Ribbed T175-MR / T175 Multi-Ribbed / Ribbed ADV200-MR / ADV200 Multi-Ribbed / Ribbed

T200A-MR / T200A Multi-Ribbed / Ribbed

#### **Face Sheet Thickness**

T150-MR / T150 0.016" (0.41mm) T175-MR / T175 0.019" (0.48mm) ADV200-MR / ADV200 0.016" (0.41mm) T175-20 0.037" (0.94mm) T200A-MR / T200A 0.025" (0.64mm)

# Maximum Opening Width

T150-MR / T150 29'-4" (8941mm) T175-MR / T175 36'-2" (11024mm) ADV200-MR / ADV200 30'-2" (9195mm) T175-20 36'-2" (11024mm) T200A-MR / T200A 24'-2" (7366mm)

# Maximum Opening Height

All models 22' (6706mm)

## Finish

Two coat, baked-on paint system on exterior side, primer and polyester finish coat.

T150-MR / T150 White / Brown / Silver / Bronze / Charcoal Grey / Forest Green T175-MR / T175 White / Brown / Café / Silver

ADV200-MR / ADV200 White

T175-20 White T200A-MR / T200A White













Additional colors are available upon request.

# Warranty

10 years against delamination of the panels

1 year on materials and workmanship

